


VELTEKO

Vertical packaging
machine

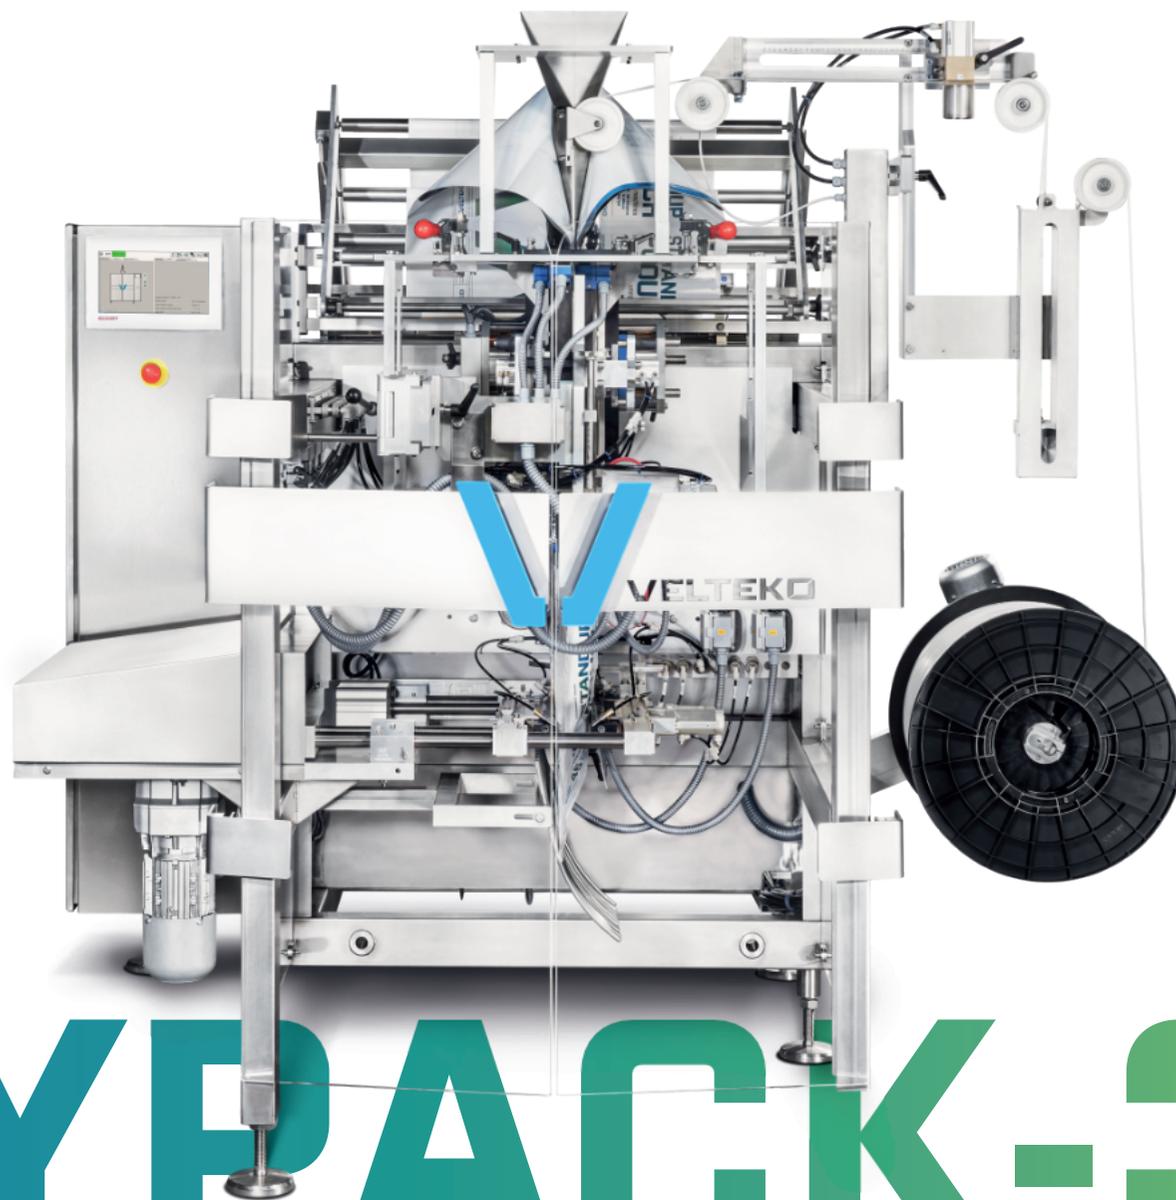

DOYRPACK-360

Designed for DOYPACK

60
bags / min
max. speed

Up to **4l**
capacity bags

Zipper
applicator with
puncher



Easy to clean
stainless-steel
frame

Fast
Changeover to
different bag type

**Easy to operate
and maintain**

MACHINE FEATURES

- Automatic film centering
- Friction/Vacuum pulling belts
- Registration mark sensor
- Mechanic/Pneumatic splicing table
- Stainless-steel machine frame
- Self-diagnostics and troubleshooting

HUMAN-MACHINE INTERFACE

- 10"/15" full color touch screen
- Industrial PC
- Intuitive machine setup and on-screen guide
- User presets for machine setup

DATASERVICE


- Online service support
- Online data management
- OPC dataservice available

Learn more...




3 TYPES OF BAGS


DOYPACK



„G“ type



3 side seal



All dimensions in mm

FORMED, FILLED AND SEALED TO PERFECTION

- ❑ Flawless DOYPACK bags and seals
- ❑ Over 15 years of experience and in-house research & development
- ❑ Up to 16 variations of DOYPACK

DOYPACK
+ Euroslot




DOYPACK
+ Carry handle




DOYPACK
+ Reclosable flap




DOYPACK
+ Zipper



DOYPACK
+ Zipper + Euroslot



DOYPACK
+ Zipper + Carry handle



VELTEKO Philosophy


Provide customers around the world with a wide range of versatile and specialized vertical packaging solutions tailored to their individual needs.

Advanced Engineering, Design and Construction


Extreme reliability and an extra long service life are a direct result of VELTEKO's cutting edge engineering and design, combined with precise manufacturing in the Czech Republic using the highest quality materials and branded components.

We supply complete packaging systems

- ▣ *Upstream and downstream systems*
- ▣ *Custom project engineering*
- ▣ *Technical and engineering support throughout the packaging system's life cycle*

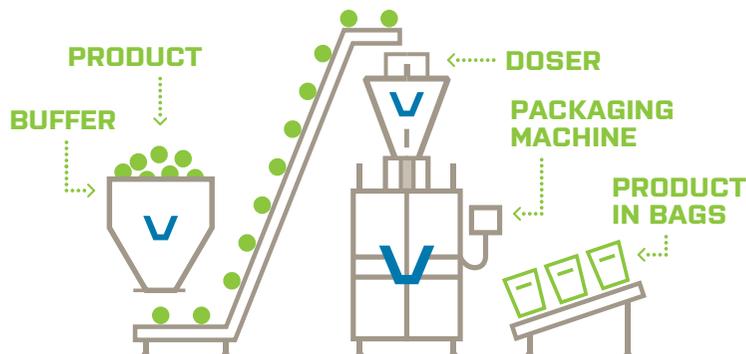

Technical parameters

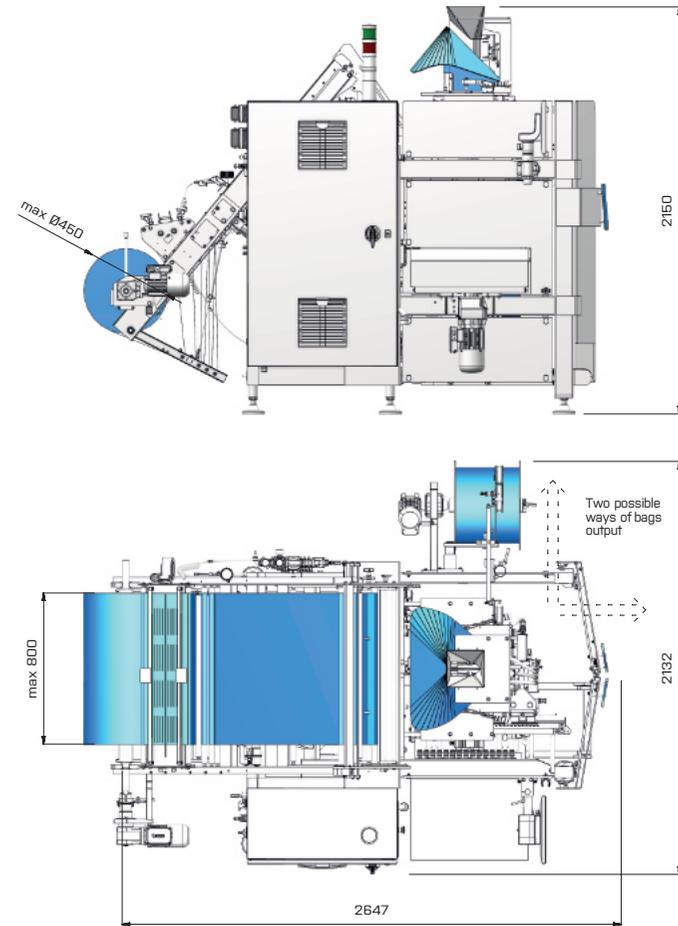


DOYPACK-360-A-STEP	
Operating mode	Intermittent motion
Speed	60 bags/min
Max. dimension of cross seal	360 mm
Protection	IP54
Construction materials	Stainless steel

Contacts

VELTEKO CZ s.r.o.
K Borovickam 1716
258 01 Vlasim
Czech Republic
Tel. +420 317 846 473
velteko@velteko.cz

VELTEKO POLSKA Sp. z o. o.
Ul. Sw. Michala 43
61-119 Poznań
Polska
Tel. + 48 61 650 34 07
velteko@velteko.pl

GLOBAL SALES NETWORK

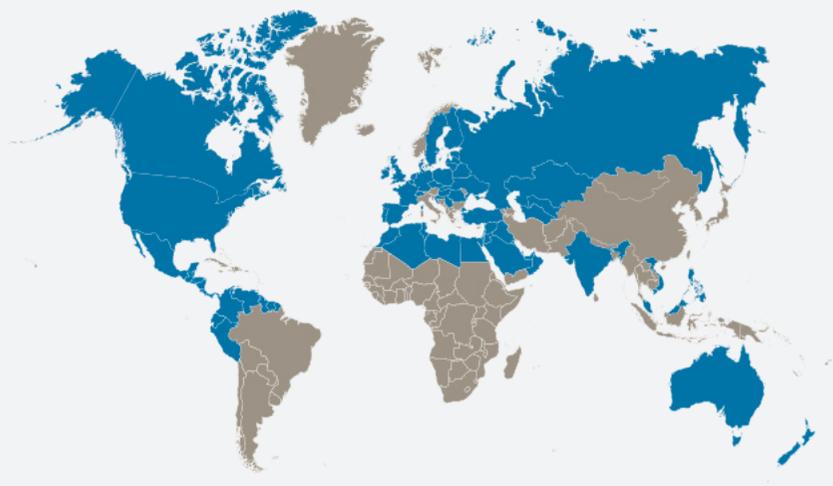

REGIONS COVERED BY VELTEKO DISTRIBUTORS

Your VELTEKO Distributor



www.velteko.com

The contents of this catalog are not an offer for a contract, a promise to conclude a contract nor any legal proceedings by VELTEKO s.r.o. regardless of its content or denominations. VELTEKO s.r.o. reserves the right to change the specifications of machines that are illustrated and described in this catalog. Photos of machines are for informational purposes only and may contain optional accessories. Please contact your local distributor to receive an offer that is tailored to your requirements.

More from our portfolio

VERSATILE-280

- 100 different bag types with one machine
- 200 bags/min maximum speed
- 5 - 45 min. changeover to different bag type
- More than 16 variants of DOYPACK bags



DOSING DEVICES

- Complex range of dosing devices and weighers for a wide range of food and non-food products
- Volumetric friction, volumetric flap and auger filler dosers
- Vibratory and belt dosing weighers



VELTEKO – The vertical packaging machine experts